

Gefran Software



Applications

- Parameterisation of Gefran devices (Instrument, Drives, Sensors)
- Tuning of control parameters with on-line tests and Trends
- Management of parameter archive for multiple configuration

Characteristics

- Guided selection of products
- Simplified setting
- Multilanguage
- Printing of parameters
- Creation and saving of recipes
- Autoscan of network

Profile

GF_eXpress is the software for configuring/parameterising the components, automations, drives and sensors in the Gefran catalogue. Selecting and parameterising the instrument is easy and intuitive thanks to a graphic interface, with devices divided by type and function.

The product to be parameterised is selected by means of a context menu and with visual selection by means of real images of the product.

This lets you have a single device library for all Gefran products.

The available product groups are:

Instruments

Controllers	Geflex	Indicators
1000 series	Geflex	2000 series
2000 series	GFX-OP	4 series
800 series	GFX4	40 series
600 series	GFX4-IR	
400 series		

Drive

DP Converter	Lift	Inverter	Servodrive
TPD32	ADL200 series	ADV200	XVy
	AGyL	ADV20	XVyA
	QxL	ADV50	
		AGy	
		QUIX	

The adoption of XML format for describing the configuration data of each device makes it easy to expand the catalogue and its parameters.

The selected product can be configured:

- by exploiting a sub-set of defined parameters
- by using a guided graphic interface with context menu

The creation of custom parameterisation menus with a limited sub-set of data is provided to improve and increase the effectiveness of device configuration.

GF_eXpress is based on HTML technology. Its graphics and contents are intuitive and easy to use.

Multilanguages support is provided for the interface and description of configuration parameters.

The use and support of UNICODE format for multilanguages management allows integration of languages that use special characters (Chinese, Korean, Russian, etc.).

GF_eXpress also provides the following functions:

» [Autoscan](#)

Configuration of parameters for connection to the device for parameter downloading can be done manually or with autoscan.

The [Autoscan](#) function automatically searches for the device connected to the development PC, sending serial commands that identify the communication type and parameters.

» [Monitor Window](#)

By activating the connection with the device, you can display the value of each parameter in real time on the configuration pages.

In addition to value display, the [Monitor Window](#) function lets you change parameters in real time.

» [Recipes](#)


Saves and files a list of parameters. This function lets you manage identical configurations on different devices or transmission of configurations among different users.

» [Oscilloscope](#)

Monitors up to 8 curves simultaneously. The reference value on the displayed curve can be selected from all available variables in the selected device.

» [Print](#)


Prints the displayed or selected variables. The [Print](#) function includes a preview.

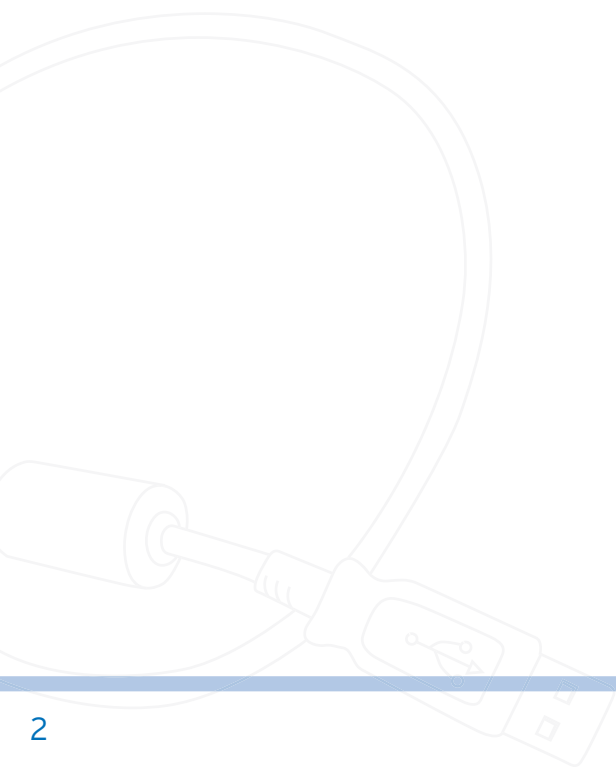

Connections


There are two types of connection between configuration PC and the device. The connection type is based on the type of device used.

1. RS485 connection for Geflex devices (GFX, GFX4, GFXTERMO4)

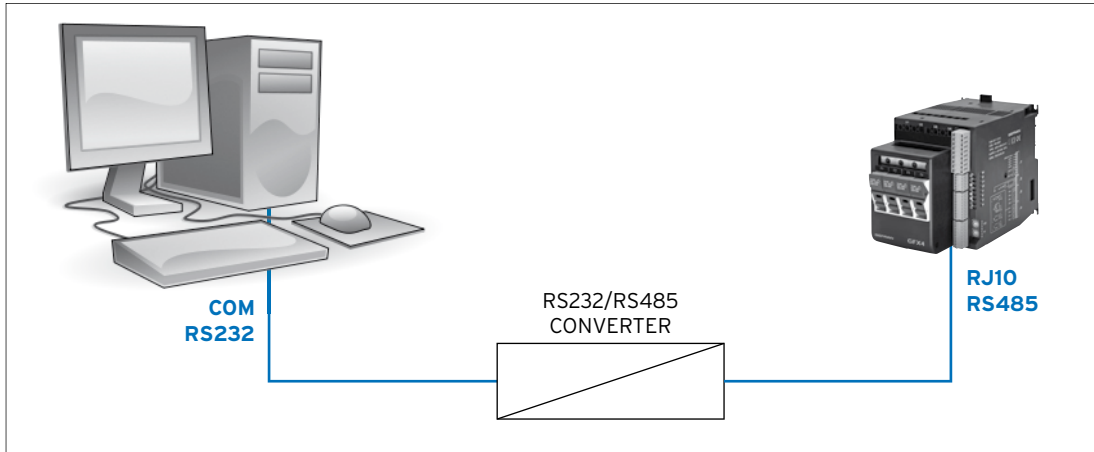

This connection requires a RS232/RS485 converter and connection cables for connection between the PC on which GF_eXpress is installed and the device to be configured.

2. TTL connection (Controllers, Indicators)

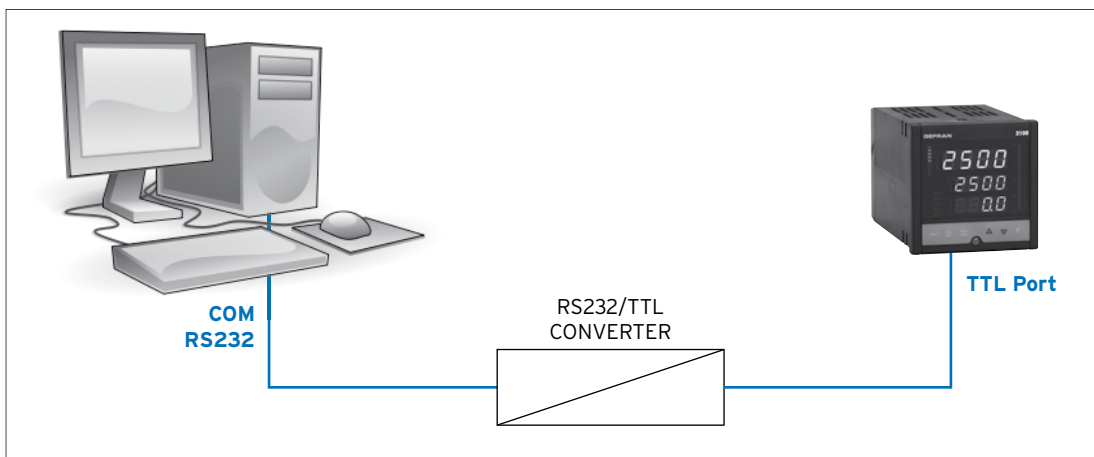

This connection requires a RS232/TTL converter and connection cables for connection between the PC on which GF_eXpress is installed and the device to be configured.

Technical Data

Operating system

- Windows 2000
- Windows XP

Minimum PC configuration

- Pentium CPU
- RAM 512 MB
- Available hard-disk space > 200 MB
- min. VGA graphics card (1024x768)
- N. 1 RS232 serial port
- N. 1 Ethernet port
- DVD drive

Supported communications

- Serial communication with device (SLINK3, CANopen, Cencal, Modbus protocols)
- Ethernet communication with Modbus TCP devices



Order code

F043956	GF_eXK-0-0-0	GF_eXpress software on DVD, complete with RS232/TTL converter cables for PC-Instrument connection.
F043957	GF_eXK-1-1-0	GF_eXpress software on DVD, complete with RS232/RS485 converter cables for PC and Geflex connection.